Numen

User Manual V1.0

01 / Product Overview

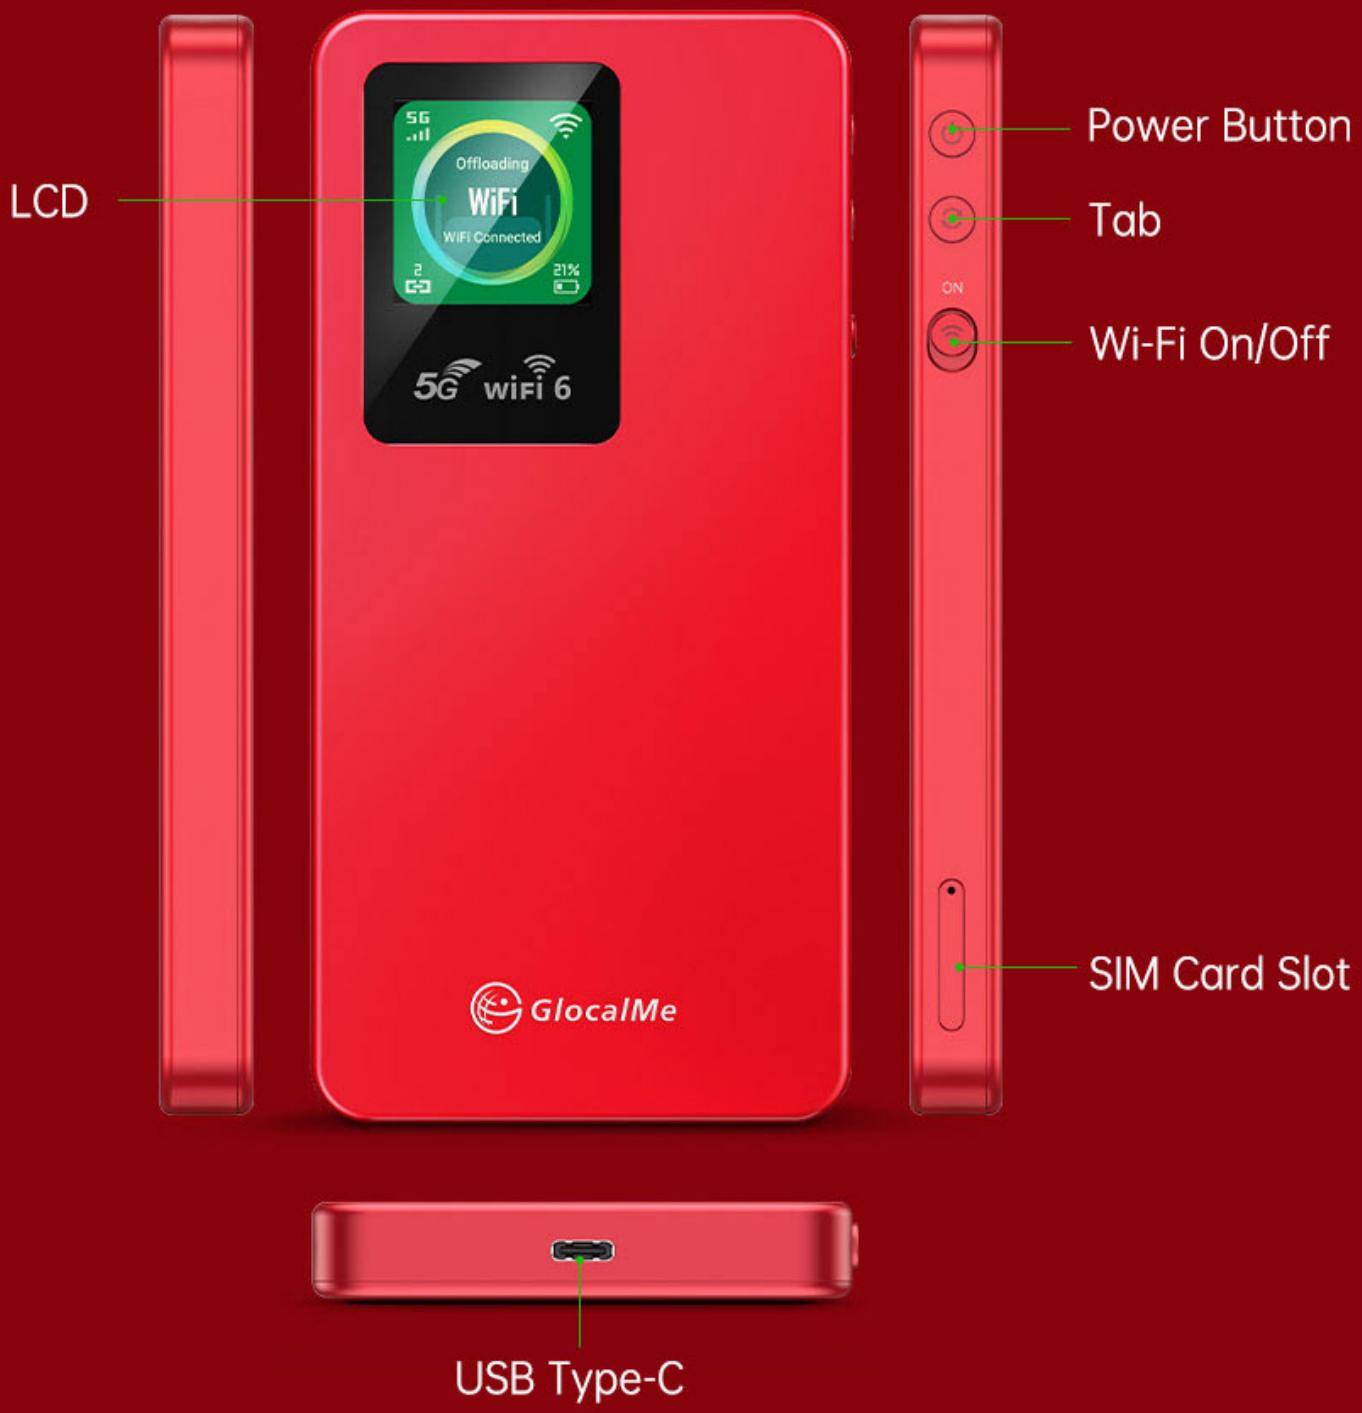

Function Introduction

1. Power On: Press power button for 3 seconds.
2. Power Off: Press power button for 5 seconds.
3. Push Up Wi-Fi Bottom: Wi-Fi on

4. Push Down Wi-Fi Bottom: Wi-Fi off

02 / Technical Specification

Brand: GlocalMe　Model No.: GLMU20A03

Specification:

Size: 148x72x12.7mm

5G NR: n1/n3/n5 /n7/n8 /n20 /n28 /n38/n41/n77/n78/n79

FDD LTE: B1/B3/B5/B7/B8/B18/B19/B20/B26/B28/B32

TDD LTE: B34/B38/39/B40/B41/B42/43

WCDMA: B1/3/5/6/8/19

Max upload speed: 650Mbps

Max download speed: 2.5Gbps

Wi-Fi: IEEE 802.11a/b/g/n/ac/ax

SIM Slot: 1 x Nano SIM

USB port: Type-C (Input)

Battery Capacity: 3900mAh

Power Input: DC 5V= 2A

Note: Listed wireless data transfer rates are the theoretoical maximum.

The actual data transfer rate may vary depending on the network

03 / UI Display Instructions

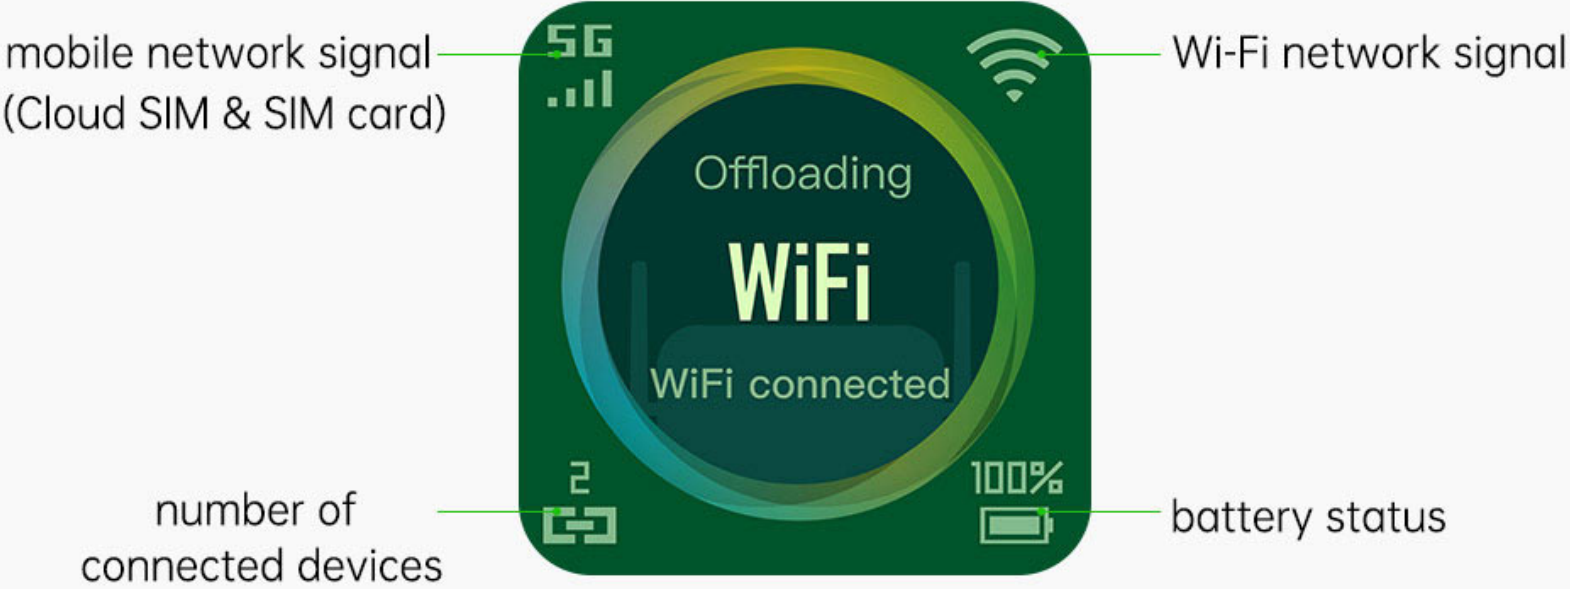

UI Menu-1

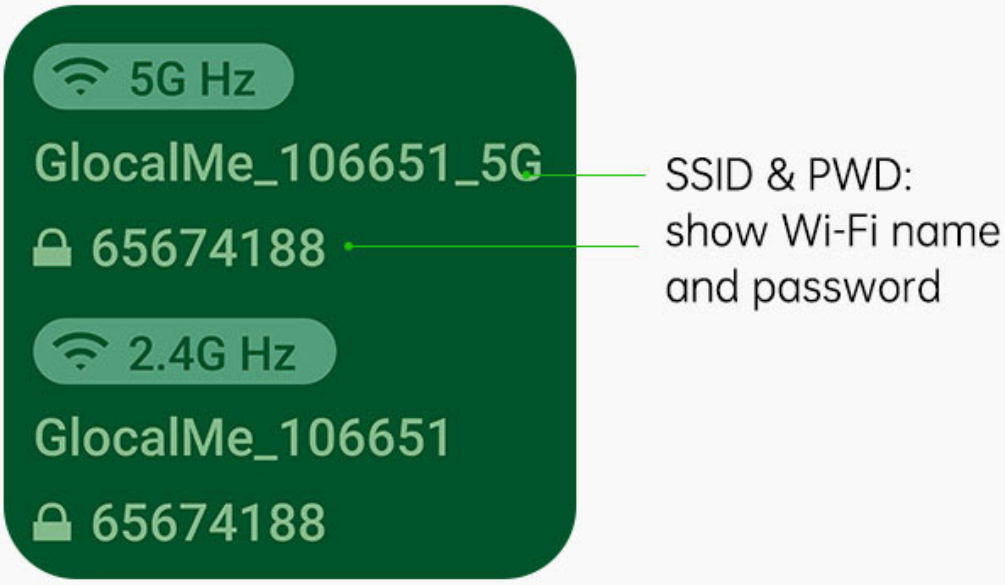

5G Hz

GlocalMe_106651_5G

65674188

2.4G Hz

GlocalMe_106651

65674188

UI Menu-2: Display Wi-Fi name and password



UI Menu-3:
Scan QR code to download APP or bind account

When the device is unbounded, it will display the QR code for binding and downloading app



+852 8191 2660

+86 400 699 1314

www.glocalme.com

IMEI 783627086002

UI Menu-4: Contact Information Display

04 / User Manual

1.【How To Use GlocalMe Cloud SIM Service?】

① Download GlocalMe APP

Download and install GlocalMe app on your mobile phone .

② Create a GlocalMe Account (In App)

Click【Login】-【Register】

Follow the steps to register an account

(You can register using an email or mobile number)

Please note that the information in the user manual depending on the software version.

③ Link Device with GlocalMe App

Open GlocalMe App and click【My Device】-【Link Device】
Press button for the QR code, use the QR code scanner to scan it.

④ Purchase In-App GlocalMe Data Plans

Choose the data plans that suit your needs， Restart the device after purchasing flflow package. (Skip this step if you have already ordered a data plan with the purchase of your device)

⑤ Turn On Numen

Press and hold the power button for 3 seconds (if you cannot turn on the new Numen, please charge the device and wait for device to be fully charged)
If the device has been powered up before binding , you need to restart it.

⑥ Connect To Wi-Fi

The first start-up will take few minutes, please wait patiently.
Press the key ⟳ to switch to the Wi-Fi and password screen or you can find the Wi-Fi network name and password at the back of Numen.
On your mobile device(s) under Wi-Fi settings search for the network and

2.【How To Use A Physical SIM Card?】

（Numen is default to run on Cloud SIM services, but it also supports the use of local SIM cards）.

① Insert A SIM Card

Open the SIM card tray with a pin and insert the SIM card as shown.
in the picture below. Numen device only supports Nano-SIM cards.

② Switch SIM card mode

If you install the SIM card when the device is off , it will automatically switch to SIM card mode once you power on the device.

If you install the SIM card when the device is on , you need to reboot to make it switch to SIM card mode automatically.

③ Unlock the SIM Card (If PIN protected)

If the SIM card is protected by PIN code , please go to the Numen detail information page in the GlocalMe App to click 【SIM card management】 , and then click 【PIN/PUK】

Please follow the steps to input the PIN code to unlock the SIM.

④ Set The APN Manually

If you still cannot connect to the network after the above steps, click 【SIM card management】 , under the SIM card mode , click【APN setting】 - 【Add APN】

Enter the APN of your SIM card operator and click save.

3. How To Use Offloading?

Connect the Wi-Fi

Open the device detail page in the APP and open 【Device management】

Open 【Offloading】 click the start button in the current page;

Click the button for adding Wi-Fi, find home WiFi and add it to your Wi-Fi list, it'll automatically switch to the home Wi-Fi and connect after few seconds; The Offloading function can choose the best network by analysing the quality of the network.

05 /How to set the network for children use

Children network setting is divided into two modes: free mode and blacklist mode. The system defaults to free mode and users can also manually switch to blacklist mode

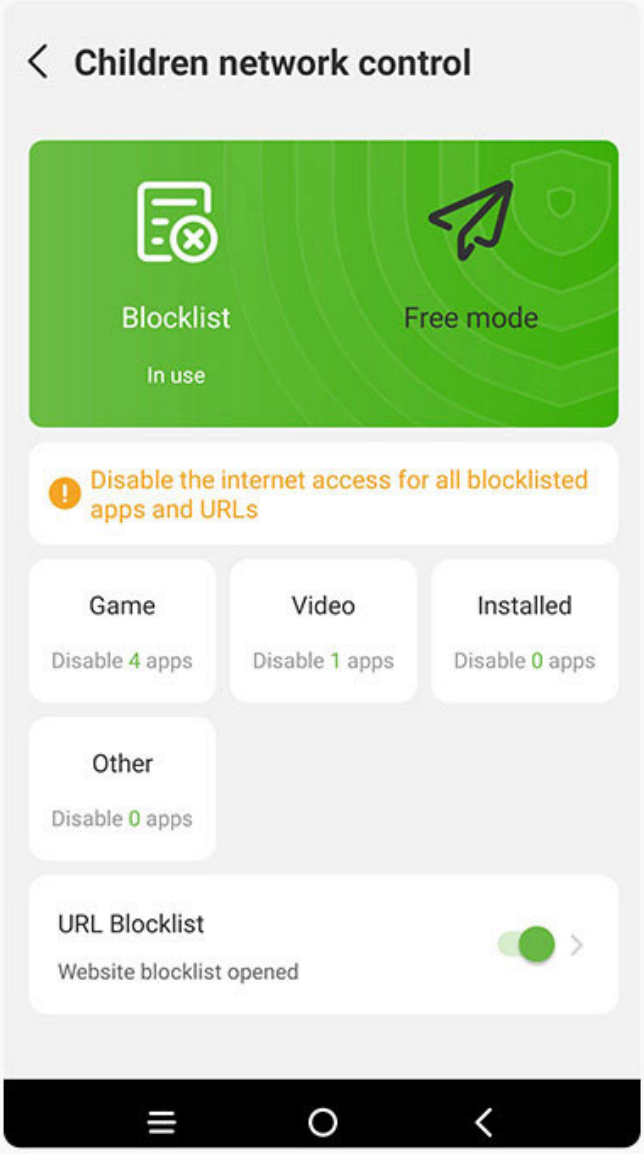

Children network control

Blocklist

In use

Free mode

Disable the internet access for all blocklisted apps and URLs

Game

Disable 4 apps

Video

Disable 1 apps

Installed

Disable 0 apps

Other

Disable 0 apps

URL Blocklist

Website blocklist opened

① Blacklist Mode

Click blacklist to switch to blacklist mode

Click app type card to set the network for apps

Click website blacklist to set the network for websites

All websites and apps in the blacklist can't access network

② Free Mode

All websites and apps in the free mode can access network without any controli.

06 /How to check the connected devices and set network for them

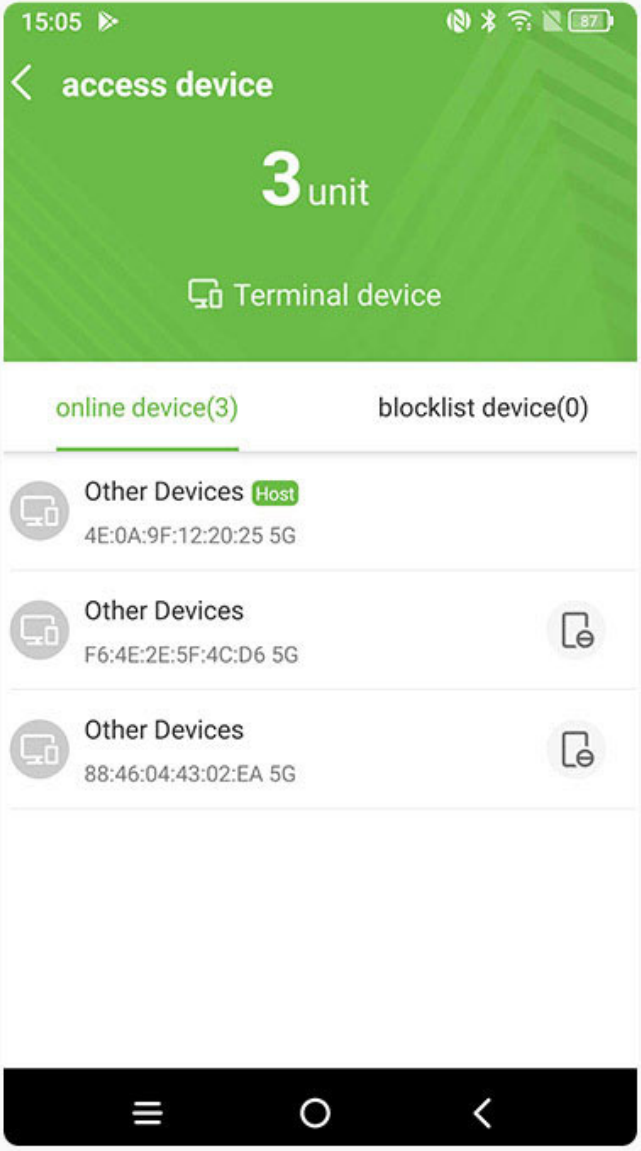
15:05

access device

3 unit

Terminal device

online device(3)   blocklist device(0)

Other Devices Host
4E:0A:9F:12:20:25 5G

Other Devices
F6:4E:2E:5F:4C:D6 5G

Other Devices
88:46:04:43:02:EA 5G

Click [connected devices] in the device detail page to check the informationi.
Click [add to blacklist icon] to add the device to blacklisti.
Devices in blacklist can’t connect to Wi-Fi.

07 / Note

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment offff and on, the user is suggested to try to correct the interfernce by the following measures:
--Reorient or relocate the receiving antenna.
--Increase the distance between the equipment and receiver

--Connect the equipment to an outlet on difffferent circuit to the receiver
--Consult the manufacturer or an experienced radio/TV technician for help.



Information on the disposal and recycling of the devices.
This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset,adapter,or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal wasted and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, housedhold waste disposal service, or retail store.
Disposal of the device and batteries (if included) is subject to WEEE. Directive recast (Directive 2012/19/EU) and battery dirctive (Directive 2006/66/ec). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risk of any hazardous subsatances that may be present.

Warning

Specific Absorption Rate (SAR) refers to the rate at which the body absorbs RF energy. The SAR limit is 1.6 watts per kilogram in countries that set the limit averaged over 1 gram of tissue and 2.0 watts per kilogram in countries that set the limit averaged over 10 grams of tissue. During testing, the device are set to their highest transmission levels in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value.

EU Regulatory conformance

The device complies with RF specifications and when used with an accessory that contains no metal and that positions the device a minimum of 0.5 cm from the body.The SAR limit adopted is 2.0W/kg averaged over 10 grams of tissue. The highest SAR value reported for the device when properly worn on the body complies with the limit.

FCC Regulatory conformance

For body worn operation, the device complies with FCC RF exposure guidelines and when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body.The SAR limit adopted by the FCC is 1.6W/kg averaged over 1 gram of tissue. The highest SAR value reported for the device when properly worn on the body complies with the limit.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause. Undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and complies with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

深圳市优克联新技术有限公司

官网：www.glocalme.com

客服热线：+852-8191-2660(HK) / +86 400-699-1314（数字键1转售前服务， 数字键3转售后服务）

邮件：service@ucloudlink.com 技术与售后问题，请邮件联系我们

地址：中国深圳市南山区学府路深圳软件产业基地1栋A座3层

Hong Kong uCloudlink Network Technology Limited

E-mail : service@ucloudlink.com

Hotline : +852 8191 2660

Address : Suit 603, 6/F, Laws Commercial Plaza 788 Cheung Sha Wan Road, Kowloon, Hong Kong

香港uCloudlinkネットワーク技術有限公司

メールアドレス：service@ucloudlink.com

電話番号：+852 8191 2660

技術及びアフターサービス問題について、メールでこちらにご連絡ください。

アドレス：Suit 603, 6/F, Laws Commercial Plaza 788 Cheung Sha Wan Road, Kowloon, Hong Kong

GlocalMe

GlocalMe

@GlocalMeMoments

@GlocalMeMoments

uCloudlink

This product and related system are protected by one or more of uCloudlink's patents
details please refer to https://www.ucloudlink.com/patents

Copyright © 2021 uCloudlink All Rights Reserved